

STOVE GUARD SGK510


ADDITIONAL INSTALLATION PARTS

Hob width 60 cm - Heat Sensor installation options

Options (height measured from cooker top)	Location
Cooker hood (horizontal hoods only) 45 - 80 cm	Zone 1 (see image 1).
Cooker hood (horizontal hoods only) 80 - 120 cm	Zones 1 and 2 (see image 1).
Wall 80 cm	Mounting bracket required (purchased separately).
Ceiling 150 – 200 cm	Directly above the central point of the hob (max. 5 cm tolerance). Other positions using mounting bracket (purchased separately).

Hob width 90 cm - Heat Sensor installation options

Options (height measured from cooker top)	Location
Cooker hood (horizontal hoods only) 80 - 120 cm	Zone 1 (see image 1).
Wall 80 cm	Mounting bracket required (purchased separately).
Ceiling 150 – 200 cm	Mounting bracket required (purchased separately).

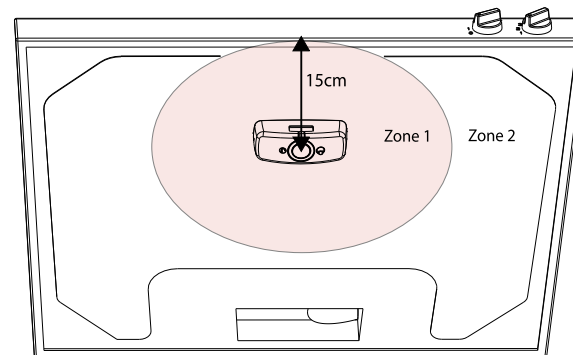

Zone 1: above the central point of the cooker (max. 15 cm tolerance to the side).

Image 1

NOTE: Additionally, a reset button is required for cookers with mechanical knobs when Heat Sensor is higher than 90 cm above the cooker.

Mounting bracket part no. SAI500-ABX
Reset button part no. SGR300